

3/16" FRAMED SERIES BY-PASS TUB AND SHOWER ENCLOSURES

PLEASE READ THOROUGHLY BEFORE STARTING INSTALLATION



**SAFETY
WARNING:**



Item	Part #	Description	QTY
1	1040	Tub Header	1
2	1062	Stay Clean Sill	1
3	1051	Tub Jamb	2
4	4032	TF-2B T-Fin	1
5	2207	Center Guide	1
6	2214	Rollers	4
7	7106	Sliding Glass Framed Panels	2
8	2223	Bumper Guides	4
9	2101	#8 x 1-1/2 FHPHSMS	6
10	2217	Wall Anchor	6
11	2102	#6 x 3/8 PHPHSMS	3

- These instructions must be followed carefully to reduce the risk of serious injury. Any deviation from these instructions can create a serious safety hazard.

- Glass panels are tempered to conform with general building and safety codes. Be very careful handling tempered glass. Especially protect all edges of the glass from contact with hard surfaces.

- All exposed aluminum edges should be deburred to avoid serious injury.

SPECIAL NOTE:


Drilling holes and anchoring horizontal sills and curbs to thresholds and tub decks is discouraged. Using masking tape or double-sided tapes to hold these components down during installation is recommended to minimize the potential for water leaking underneath flooring. These instructions do not recommend drilling holes on horizontal surfaces for this reason.

STEP 1

CENTERLINE & TUB JAMBS

Locate as accurately as possible the centerline of the shower or tub rim and mark it with a water soluble marker. In most installations, the Stay Clean Sill (Item #2) is installed directly over and parallel to the centerline. Measure the wall to wall distance, 0/100" above the tub rim to allow for any radius or obstructions in the corners. From this measurement, deduct 1/2" and cut the Stay Clean Sill to length. Mark the center of the Stay Clean Sill for the Center Guide(#5). Use the Center Guide's hole for a template and mark the location onto the sill. Drill the installation hole with a 1/8" drill bit. See illustration #1. Do not attach the Center Guide at this time. Install the T-Fin(4) into the Stay Clean Sill with the fin pointing down. Flush cut at the ends.

ILLUSTRATION #1

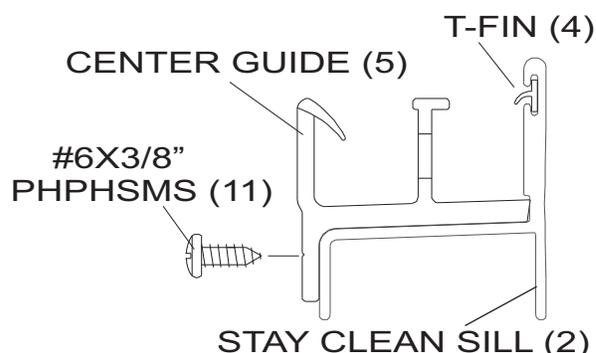


TOOLS REQUIRED FOR INSTALLATION

- | | |
|---|--|
| <ol style="list-style-type: none"> 1. Caulking gun w/ clear sealant (recommended) 2. Level 3. Hacksaw 4. Painters Tape 5. Electric drill & #2 Phillips Tip | <ol style="list-style-type: none"> 6. 1/8" Drill bit for #6x screws 7. 3/16" Drill bit for plastic Anchors (Carbide for Tile) 8. Mallet (Rubber or Wood) 9. Mill file to smooth cut and radius corners 10. Tape measure |
|---|--|

STEP 2 TUB JAMBS:

The Tub Jambs (3) should be installed starting at the shower head wall. Set the Tub Jamb on the centerline of the shower base and against the wall. Plumb the jamb, and using the factory holes as a template, mark the holes onto the wall. Drill the holes with a 3/16" drill bit (carbide bit for masonry). Insert anchors(10) into the holes. Secure the Tub Jamb to the wall with three #8x1-1/2" FHPHSMS (9), attaching a Bumper Guide(8) with the top and bottom screws. See Illustration #2. Be sure to orient the Bumper Guides to accept the proper sliding panel. The inside panel will need to close on the side of the shower head. Set the Stay Clean Sill into place in the opening of the secured Tub Jamb at the base. Position and plumb the second Tub Jamb onto the opposite wall, but mark only the bottom hole. Remove the Jamb and drill the hole with the 3/16" drill bit. Insert one Wall Anchor and secure the Tub Jamb with one #8 X 1-1/2" FHPHSMS (9) and Bumper Guide (8). This will allow the Tub Jamb and Header assembly to move for the final adjustment later.

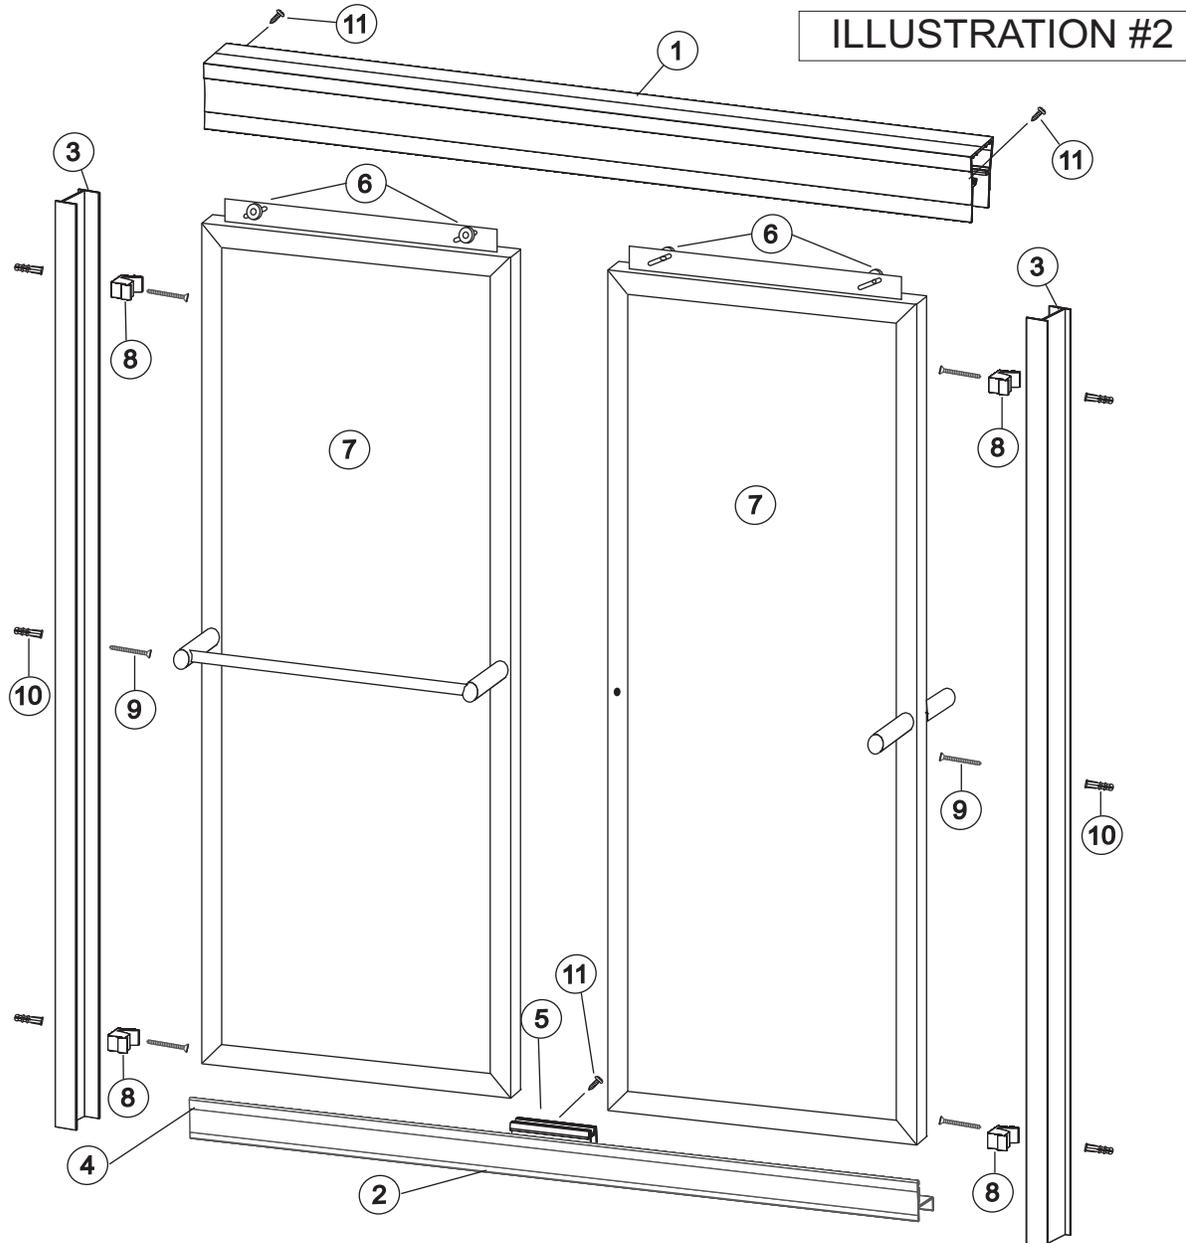

3/16" FRAMED SERIES BY-PASS TUB AND SHOWER ENCLOSURES

STEP 3

TUB HEADER:

Measure wall to wall at the top of the Tub Jamb and deduct 1/16" and cut Tub Header (1) to length. Mark where the header will attach to the Tub Jamb from the inside of the shower according to illustration (#3). Remove the Header and drill 1/8" holes at the marked locations. Set the Tub Header in place over the Tub Jamb but do not secure at this time. Screw size is a #6x3/8" PHPHSMS (11), see illustration #4.


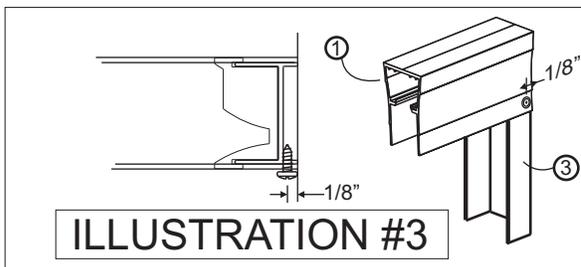


ILLUSTRATION #4

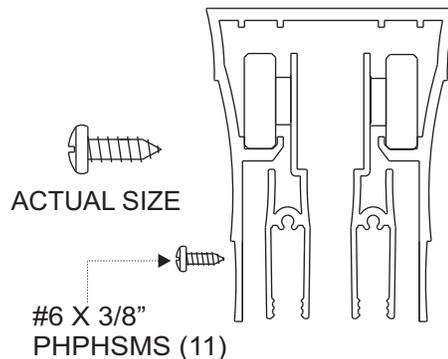

STEP 4

PANEL INSTALLATION:

Make sure that the Tub Jamb with only one screw in it is snug, but still is able to move side to side. Hang the panels in place in the Header starting with what will be the inside panel. Slide it all the way toward the fully secured Tub Jamb. Install the outside panel, making sure that the rollers on both panels are fully seated into the tracks in the header. Finish by installing the Center Guide (5) and securing it with one #6x3/8" PHPHSMS (11).

STEP 5

PANEL ALIGNMENT:


Standing outside the shower, hold the Header at the top where it meets the unsecured Tub Jamb. Be very careful to keep control of the header so that the sliding glass panels can not fall. Slowly move the sliding panels, one at a time, back and forth and into the Tub Jambs, while adjusting the header side to side, seeking a point where the panels pocket perfectly into both Tub Jambs. At this point both Tub Jambs are at identical positions on the wall. Mark the position of the Tub Jamb onto the wall. Slide both panels back to the secured Tub Jamb and remove the Center Guide. Remove both sliding panels and set them in a safe place. Move the Tub Jamb back to the marked location of the wall and mark the final two hole locations. Move the Tub Jamb out of the way just far enough to reveal the marked holes, then drill the holes with a 3/16" drill bit, and insert two Wall Anchors (10). Realign the Tub Jamb and secure with two #8 X 1-1/2" FHPHSMS (11). Reinstall both of the sliding glass panels as you did earlier in the last step, then reinstall the Center Guide.

3/16" FRAMED SERIES BY-PASS TUB AND SHOWER ENCLOSURES

STEP 6 TOWEL BAR & PULLS

The inside sliding panel, when closed, must be at the shower head wall so that it can deflect water away from the overlap of the panels at the center of the enclosure. Thus, the outside panel must be away from the shower head wall when closed. See the instructions included with the towel bar kit to install the towel bar & pulls.

This top view shows the towel bar and pull locations for a shower head that is on the left wall. If the shower head is on the right the panels would be reversed.

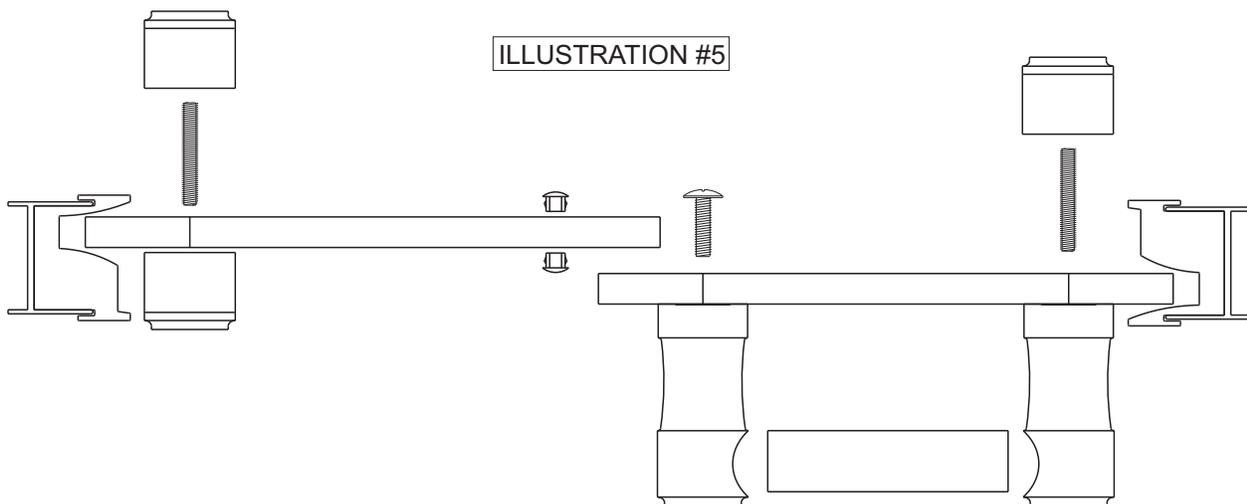

STEP 7 PANEL ADJUSTMENT

If either of the sliding panels is skewed or rubs against the sill, adjust the panels by loosening the hex nut on any of the Hanger Brackets with the Adjustment Wrench, provided in the parts kit. Be sure to re-tighten the screws.

NOTE: The panels can be adjusted while still hanging in the header. Secure the Header to the Tub Jambs by drilling through the holes drilled in the header in step #3 and into the tub jambs with a 1/8" drill bit. Then insert #6 X 3/8" PHPHSMS (Item#11) through the holes in the header and tub jambs from the inside of the shower. Tighten with a #2 phillips screwdriver or reduce the torque on the drill to prevent damage to the screws.

STEP 8 SEALANT

Apply a bead of sealant along the entire outside of the enclosure where it meets the wall and base. Pay special attention at the bottom corners where the Tub Jambs meet the Stay Clean Sill. These joints must be totally sealed for a leak proof installation.

NOTE: You may have unused items leftover depending on the desired configuration selected. For installation and technical support please reference the shipping document, the box the product was shipped in, or call the store where you purchased the product.